

INDUSTRIAL DIESEL ENGINE

KUBOTA 03-M SERIES (4-cylinder)

V2003-M-E3B




RATED POWER

32.6kW@2800rpm



Photograph may show non-standard equipment.

PERFORMANCE CURVE

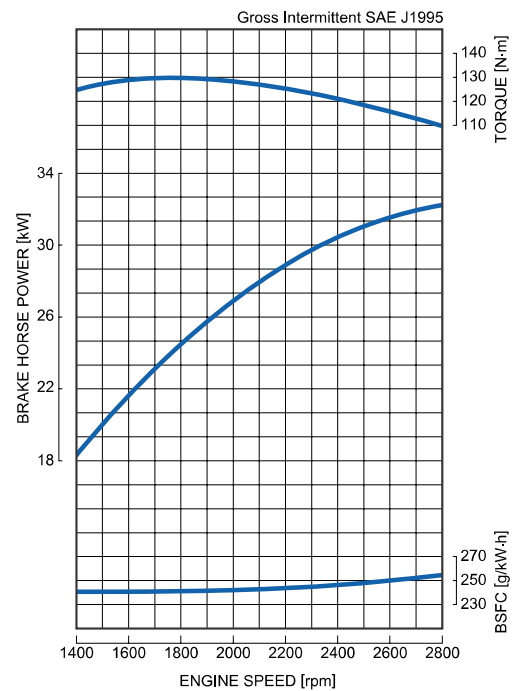

FEATURES and BENEFITS

Emissions

- The V2003-M engine complies with EPA Interim Tier 4 emissions regulations that are effective through the end of 2012. This engine also complies with EU Stage IIIA requirements that are effective through 2012 and beyond in the European market.

Durable Power

- The Kubota 03-M Series is well recognized for industrial applications. With numerous features such as a built-in solenoid, low fan position, and single side serviceability, this engine offers excellent performance characteristics and application flexibility.
- The cooling water passages between the cylinder bores, using Kubota's original casting technology as a countermeasure against heat load of high power density, provides both superior endurance and reliable engine characteristics.
- The V2003-M engine offers a seamless transition from Tier 2 to Interim Tier 4 by maintaining the same footprint and hard mounting points with only slight performance changes from the Tier 2 engine.

Clean and Quiet Power

- Kubota's original E-TVCS (Three Vortex Combustion System) has been improved. The airflow, combustion chamber and piston recess were optimized to provide a 50% lower particulate matter (PM) level, the same stringent level as above the 37kW class (EPA Interim Tier 4 Option 1).
- The half-float valve cover and MoS₂ coated pistons lower noise levels by 1.0-2.0 dBA over conventional diesel engines and provide reduced transmitted vibration from the valve area for better noise characteristics.

Option

- The Kubota 03-M Series engines offer side power take-off(PTO), in response to the trend of increasing hydraulic control devices in industrial machines. It is possible to install a hydraulic pump at two side PTO locations.

GENERAL SPECIFICATION


| | | |
|-------------------------------|-----------|---------------------------------------|
| Model | | V2003-M-E3B |
| Emission Regulation | | Interim Tier 4 / Stage III A |
| Type | | Vertical 4-cycle Liquid Cooled Diesel |
| Number of Cylinders | | 4 |
| Bore | mm (in) | 83 (3.27) |
| Stroke | mm (in) | 92.4 (3.64) |
| Displacement | L (cu.in) | 1.999 (122.0) |
| Combustion System | | IDI |
| Intake System | | Naturally Aspirated |
| Maximum Speed | rpm | 2800 |
| Output: Gross Intermittent | kW | 32.6 |
| | hp | 43.7 |
| | ps | 44.3 |
| Direction of Rotation | | Counterclockwise Viewed on Flywheel |
| Oil Pan Capacity | L (gal) | 7.6 (2.01) [US] / 9.5 (2.51) [EU] |
| Starter Capacity | V-kW | 12-1.4 |
| Alternator Capacity | V-A | 12-40 |
| Length | mm (in) | 667.1 (26.3) |
| Width | mm (in) | 499.0 (19.6) |
| Height (1) | mm (in) | 633.5 (24.9) [US] / 679.0 (26.7) [EU] |
| Height (2) | mm (in) | 220.0 (8.7) [US] / 265.5 (10.5) [EU] |
| Dry Weight | kg (lb) | 180.0 (396.9) |

*Specification is subject to change without notice.

*Output: Gross Intermittent SAE J1995

*Dry weight is according to Kubota's standard specification.
When specification varies, the weight will vary accordingly.

DIMENSIONS

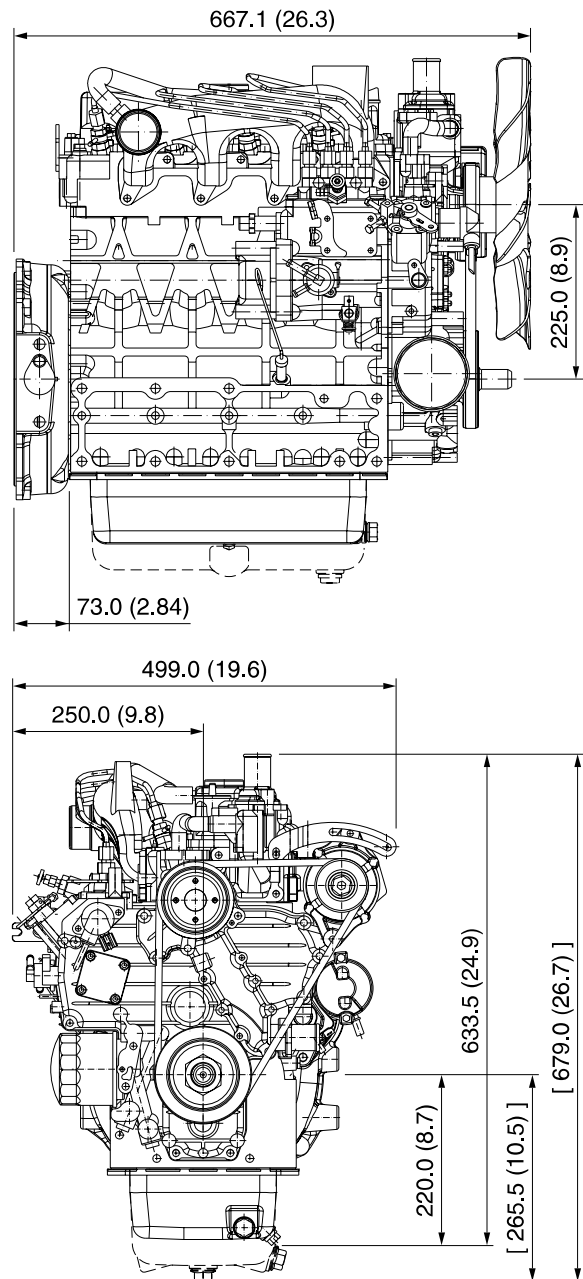

[] EU spec



KUBOTA Corporation

2-47, Shikitsuhigashi 1-chome, Naniwa-ku, Osaka, 556-8601 Japan
Fax: 06-6648-3521

<http://www.engine.kubota.ne.jp>

Distribuidor Autorizado

Calle Uno - Mza. "A" - Lote 11 - Urb. Santo Tomas de Garagay
Lima 31 - Perú

Teléfonos: (511) 535-7393 / (511) 556-2512

Celular: (51) 9835-15428

Nextel: 41*351*5428

E-mail: lacasadelbobcat@bobcatservice.com

Web.: www.kubotadieselmotors.com



BobCat's Service & Parts s.a.c.

Maquinaria - Repuestos - Servicio Técnico Especializado - Alquileres